




Installation instructions for 8800 C/8900 C replacing 8800 B/8900 B



1. 8950 G/8960 G control panel has a 5-wire control loom. The yellow wire is only used if a Side-Power Automatic Main Switch is installed.
2. A sealing compound must be used at the rear of the adapter plate when open to weather elements. e.g. flybridge & single station open yachts.
3. Position adapter plate over existing cut out on dashboard (drain grooves facing downwards). Look through the 4 outer holes in the adapter plate and check that there is an opening in the dashboard for the control panel screws - widen existing opening if required.
4. Position and mount the adapter plate to the dashboard (using the diagram as a guide) with the 4 securing screws (M3) and retaining brackets (apply sealing compound if required).
5. File the original opening as necessary to allow insertion of the 8950 G/8960 G control panel.
6. Continue to Install the 8950 G/8960 G panel in accordance to the panel instruction guide provided.
Use caution when tightening the panel screws - do not overtighten!

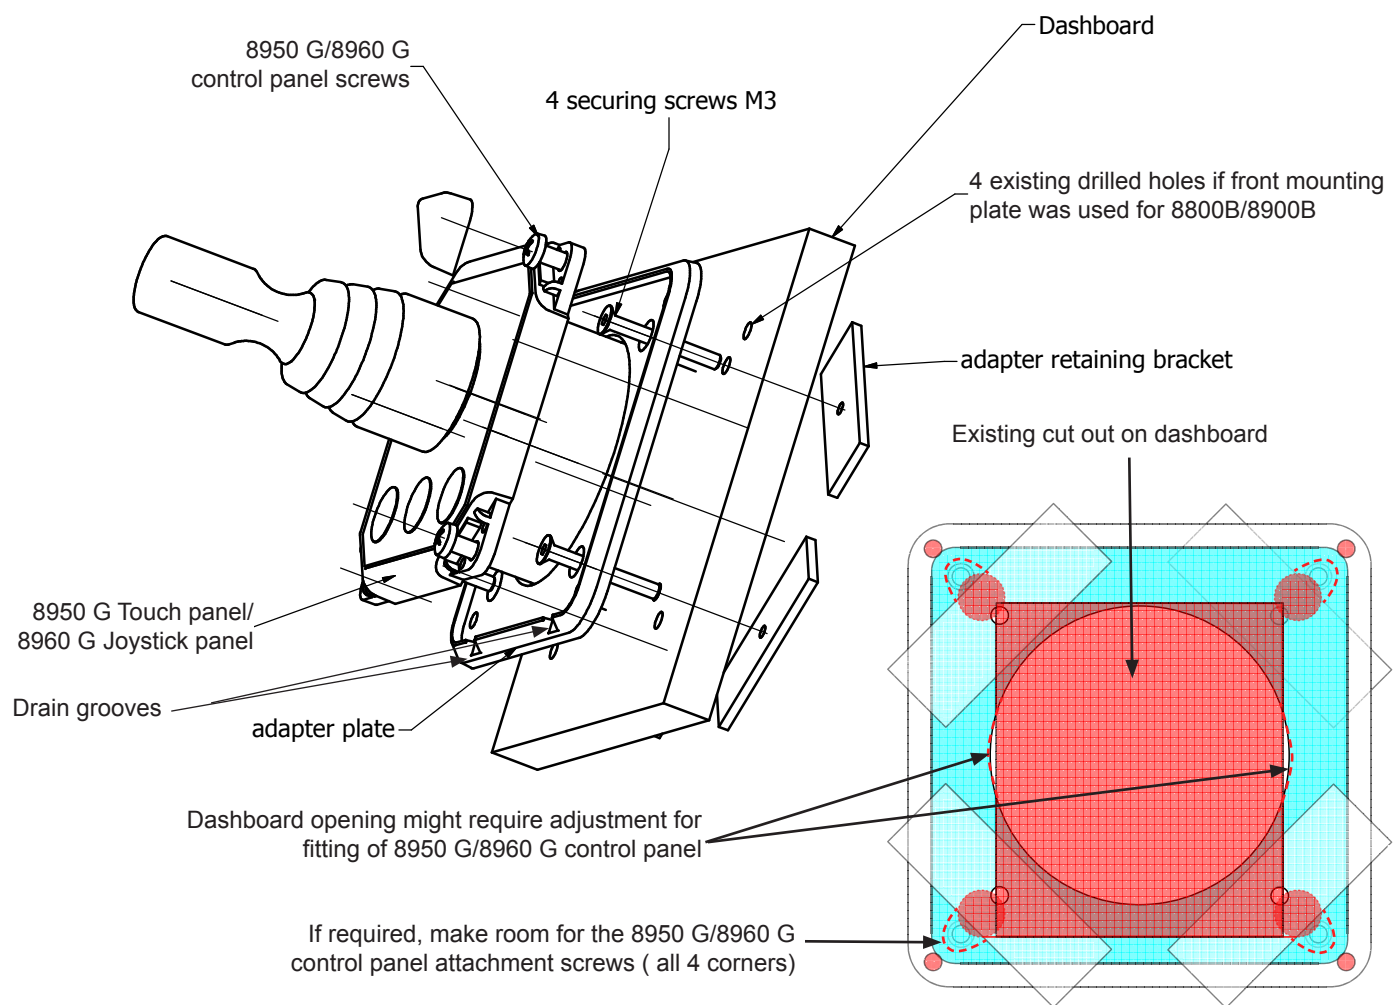