


Next generation external thrusters

From its first launch, the SX series has improved even further, offering several additional benefits for boat builders and retrofit installations.



With the hydropod low-drag cover, the SX can be mounted under the hull in the water flow for low- and mid-speed vessels. The optimal design adds minimal drag and will, in most installations, not be noticeable. The in-flow configuration is perfect for boats where it is difficult to fit a tunnel thruster or, for example, as a stern thruster for cruising sailboats.

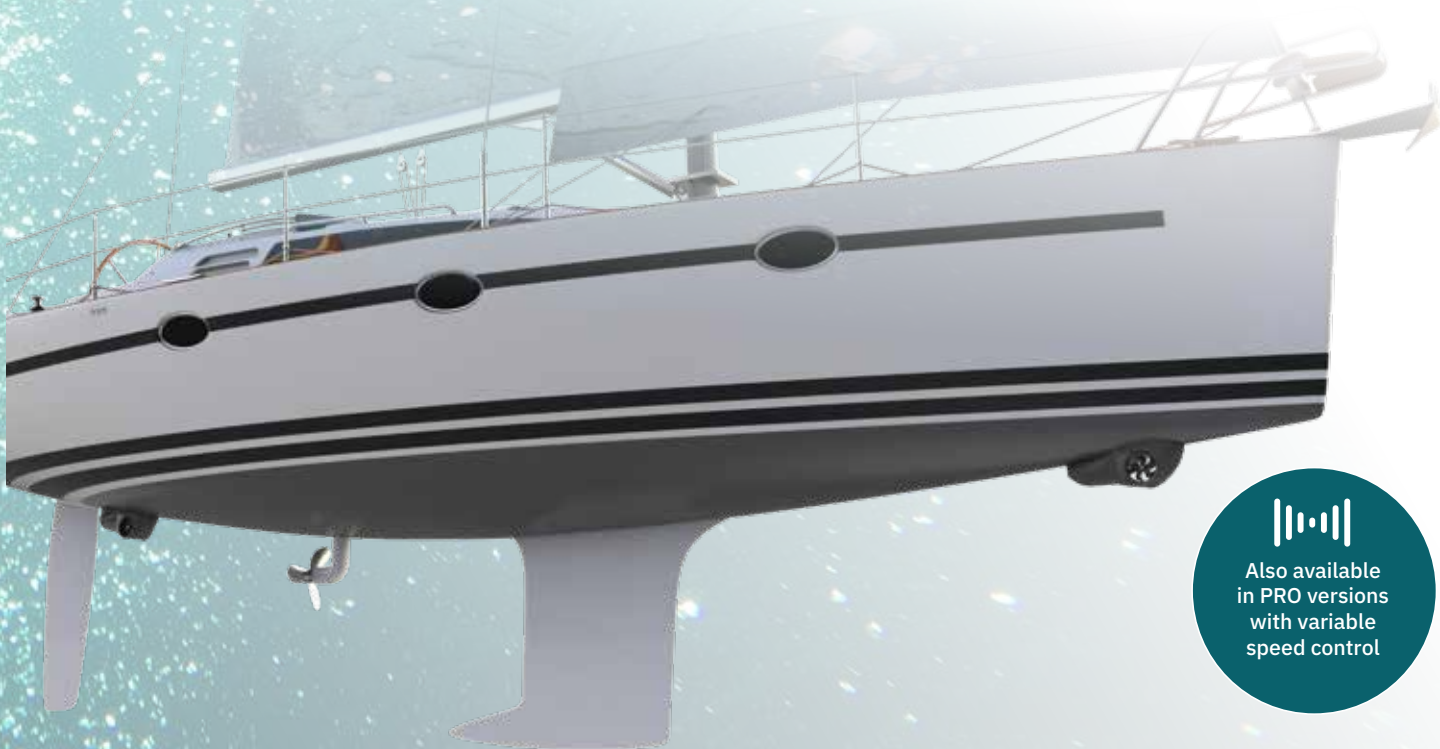

Also available
in PRO versions
with variable
speed control



Benefits

- Great alternative to tunnel and retract thrusters
- Ease of installation with no GRP work necessary
- Energy efficient and long run times
- Versatile installation fits many hull shapes
- Patented Intelligent Power Control protection as standard (IPC)
- Available in PRO version with variable speed control

By adding the Hydropod low drag cover, the SX models can be mounted under the hull in the water flow for low- and mid-speed vessels. The optimal design adds minimal drag and will in most installations not be noticeable. For a typical sail boat cruising at 7,5 knots, the added drag is less than 3kg. The in-flow configuration is perfect for boats where it is difficult to fit a tunnel thruster or for example as stern thruster for cruising sailboats.



The SX Hydropod incorporates an easy adaptable surface at the top of its mould to be easily adapted to the hulls shape during installation

The compact SX series is fitted either as a bow thruster using a hydropod cover or at the boat's stern. Available with 35 kg and 50 kg of thrust, suitable for boats up to 37 feet.

Model overview

Boat size ft	Volt	Thrust @12V	Thrust @10,5V	Weight	LxWxH mm	SKU Standard models	SKU PRO models
20' - 34'	12V	42 kg	35 kg	19,3 kg	630x183x180	SX35/140-12V-50POD	SXP35/140-12V-50POD
19' - 32'	12V	42 kg	35 kg	15,3 kg	374x183x171	SX35/140-12V-150MM	SXP35/140-12V-150MM
27' - 37'	12V	62 kg	50 kg	19,3 kg	630x183x180	SXP50/140-12V-50POD	SXP50/140-12V-50POD
27' - 37'	12V	62 kg	50 kg	15,3 kg	374x183x171	SXP50/140-12V-150MM	SXP50/140-12V-150MM