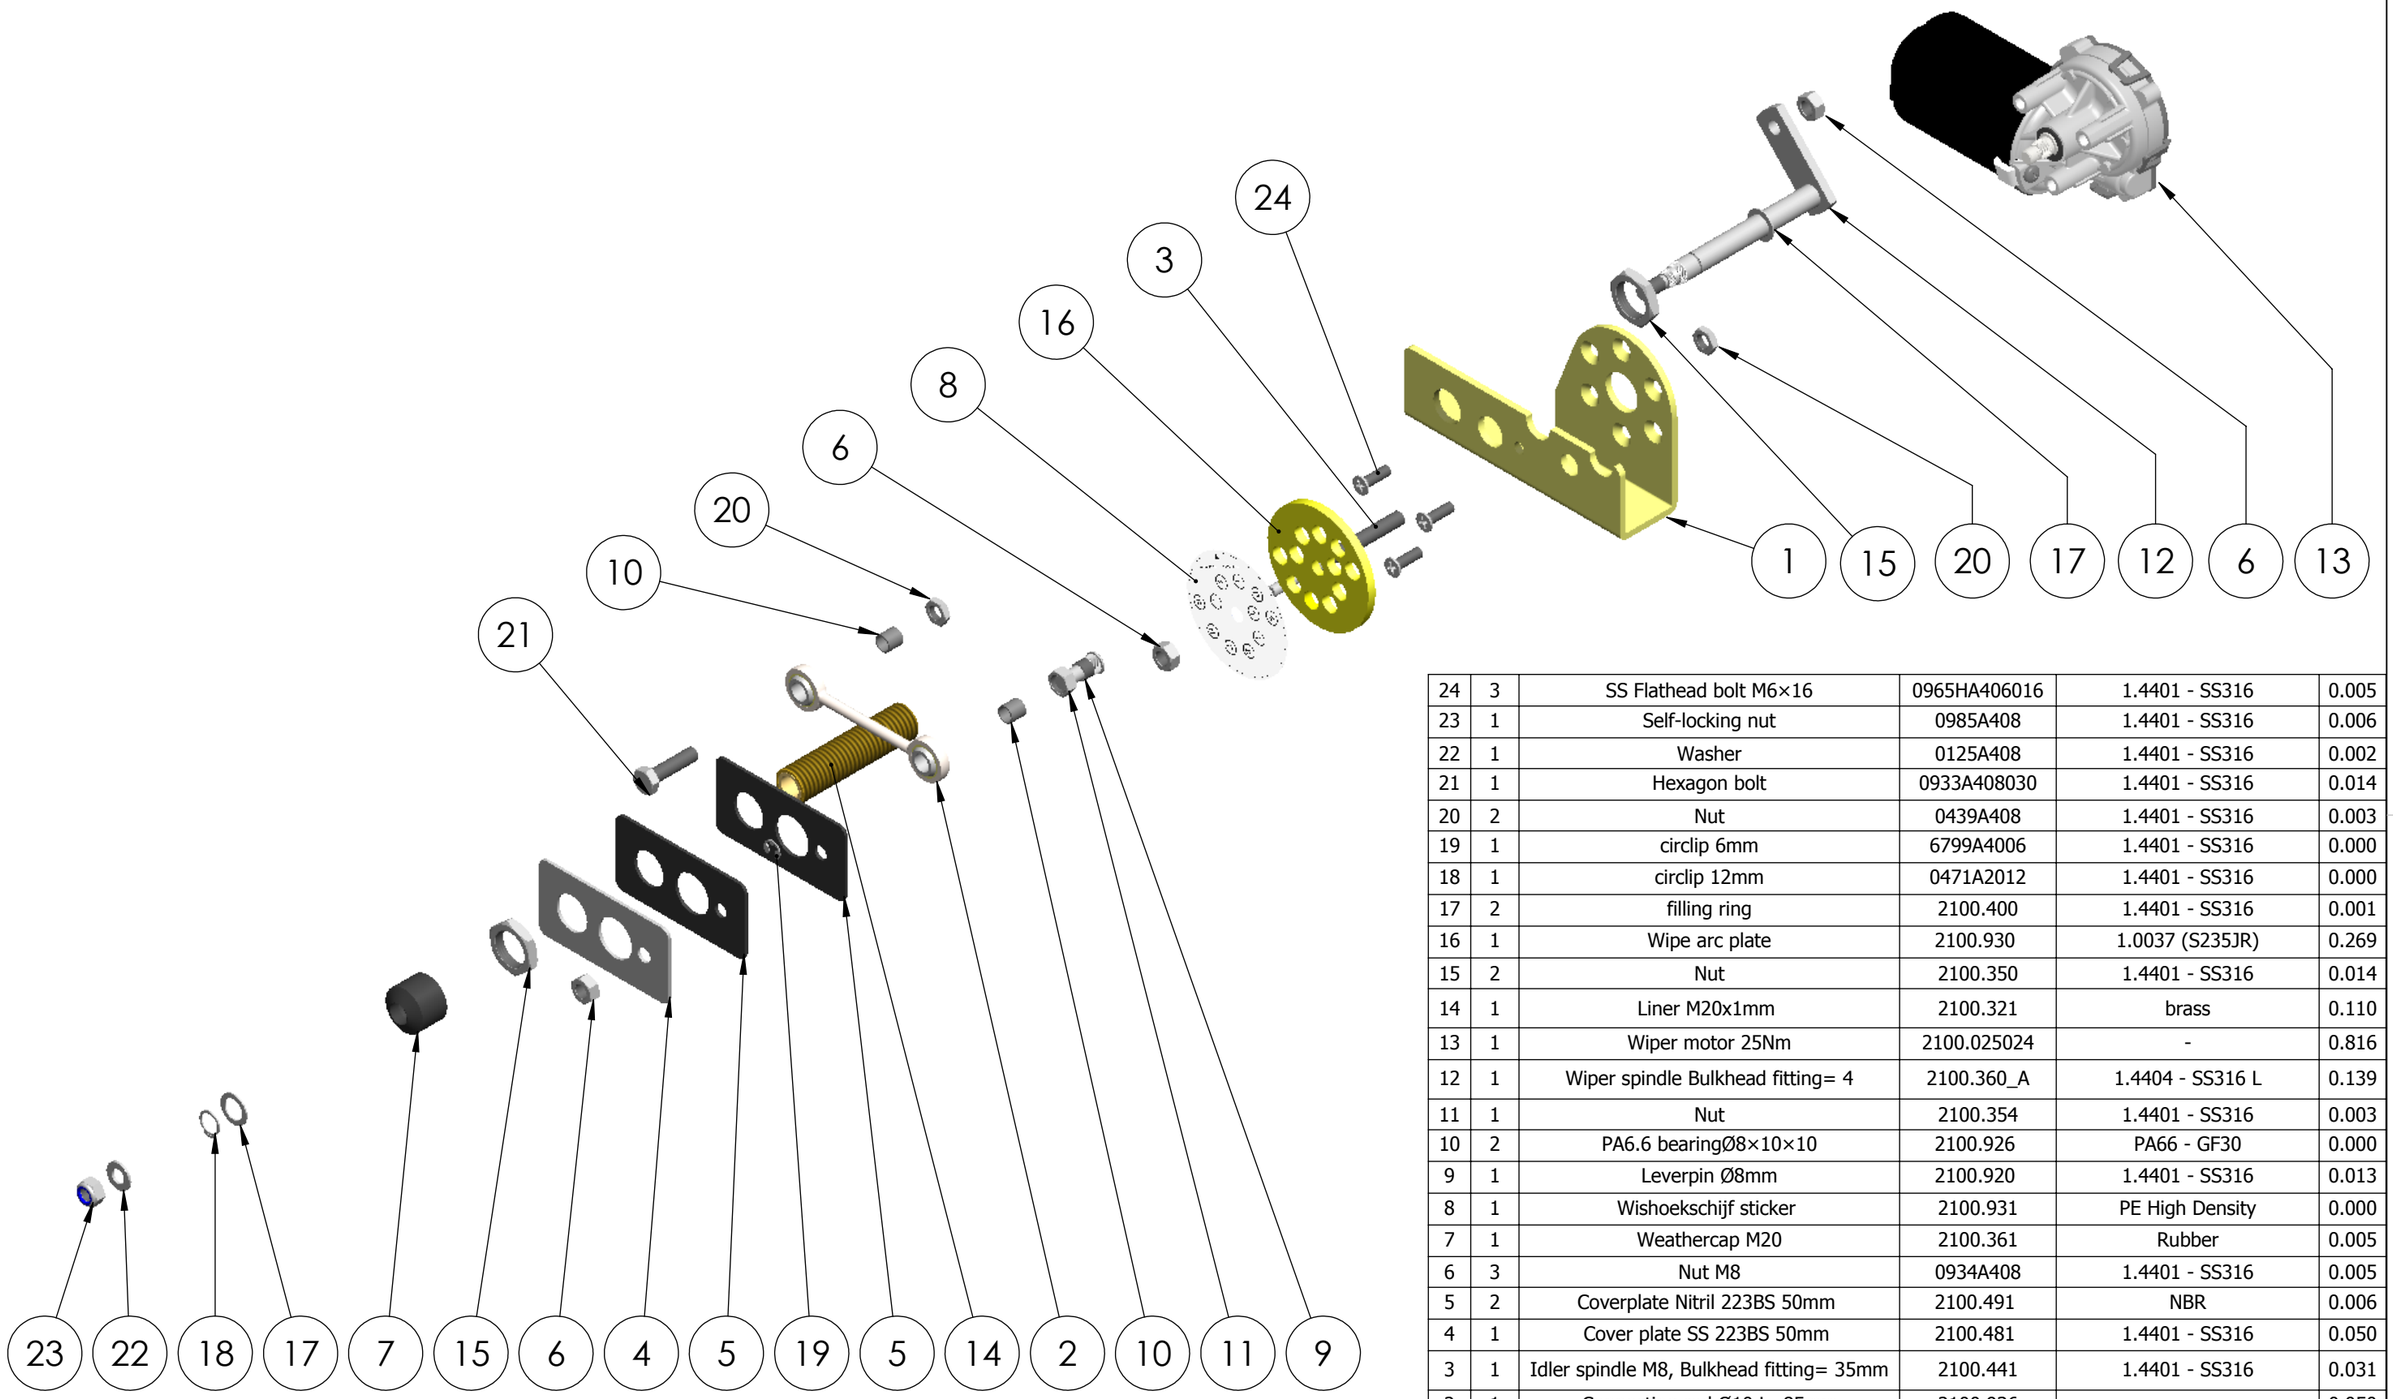

Pos.	Qty	Description	PartNo	Material	Weight
24	3	SS Flathead bolt M6×16	0965HA406016	1.4401 - SS316	0.005
23	1	Self-locking nut	0985A408	1.4401 - SS316	0.006
22	1	Washer	0125A408	1.4401 - SS316	0.002
21	1	Hexagon bolt	0933A408030	1.4401 - SS316	0.014
20	2	Nut	0439A408	1.4401 - SS316	0.003
19	1	circlip 6mm	6799A4006	1.4401 - SS316	0.000
18	1	circlip 12mm	0471A2012	1.4401 - SS316	0.000
17	2	filling ring	2100.400	1.4401 - SS316	0.001
16	1	Wipe arc plate	2100.930	1.0037 (S235JR)	0.269
15	2	Nut	2100.350	1.4401 - SS316	0.014
14	1	Liner M20x1mm	2100.321	brass	0.110
13	1	Wiper motor 25Nm	2100.025024	-	0.816
12	1	Wiper spindle Bulkhead fitting= 4	2100.360_A	1.4404 - SS316 L	0.139
11	1	Nut	2100.354	1.4401 - SS316	0.003
10	2	PA6.6 bearingØ8×10×10	2100.926	PA66 - GF30	0.000
9	1	Leverpin Ø8mm	2100.920	1.4401 - SS316	0.013
8	1	Wishoekschijf sticker	2100.931	PE High Density	0.000
7	1	Weathercap M20	2100.361	Rubber	0.005
6	3	Nut M8	0934A408	1.4401 - SS316	0.005
5	2	Coverplate Nitril 223BS 50mm	2100.491	NBR	0.006
4	1	Cover plate SS 223BS 50mm	2100.481	1.4401 - SS316	0.050
3	1	Idler spindle M8, Bulkhead fitting= 35mm	2100.441	1.4401 - SS316	0.031
2	1	Connecting rod Ø10 L=85mm	2100.936	-	0.050
1	1	Housing 223 Bored Ø17mm	2100.104	1.0037 (S235JR) passivated	0.488

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

Exalto Wiper Technologies

A3 | Do NOT Scale | Scale: 1:3 | Sheet : 2-2

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS
0.5 0.5 0.5 0.5 0.5 Ra 3.2
ANGLES IN DEGREES - TOLERANCES ±0.2mm ±0.5º - BREAK ALL EDGES

Wiper Drive unit 24V WD<35

Drawn by	: MB	Part No./Note	: XA2166.32 - 223BD
Drawn date	: 22-5-2018	Customer	:
Checked by	: JM	Reference	:
Modified by	: WB	Weight in kg	: 2.08
Modified date	: 26-6-2019	Material	: Material <not specified>